


WALL JIB CRANE WITH I-BEAM JIB

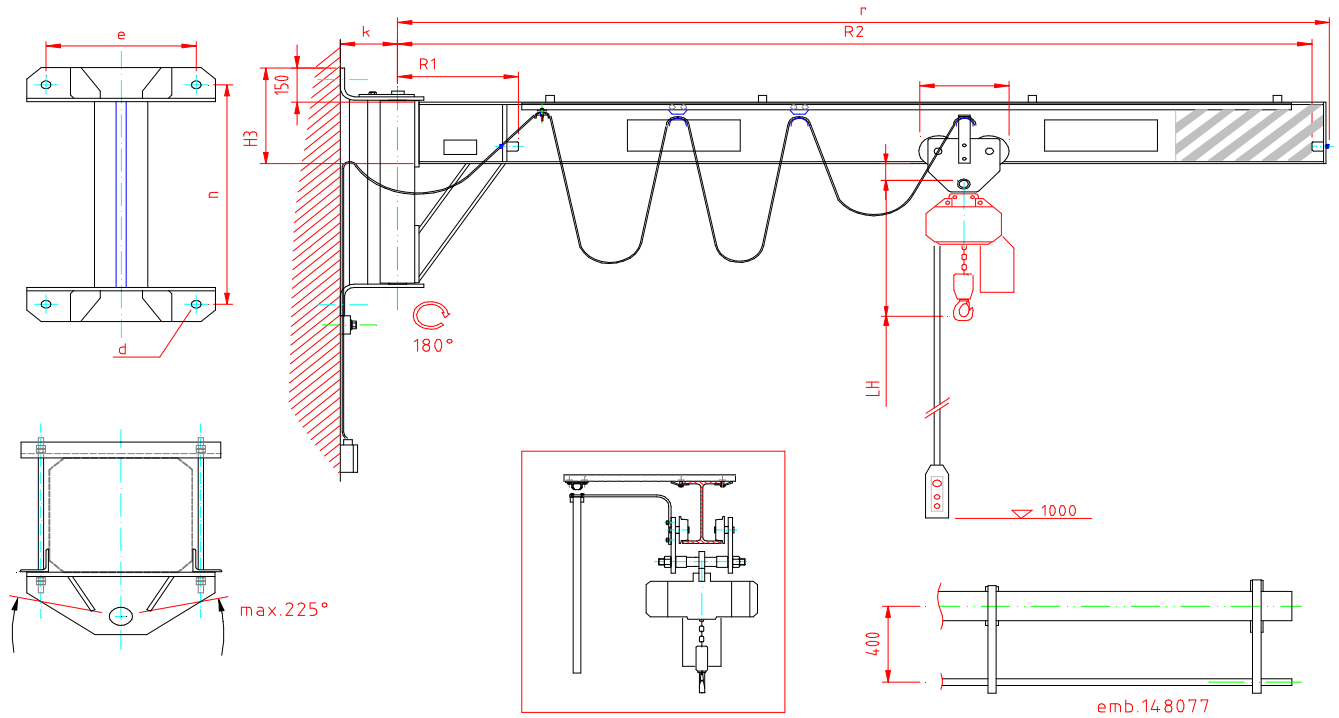


Nominal reach m	Load kg	Product number	Jib						Console								
			I-beam (IPE)	R1 mm	R2 mm	r mm	H3 (IPE + 150 mm) mm	Weight of the jib kg	Size	n mm	e mm	d mm	Horizontal force (Z)/bolt kN	Vertical force (Q) / bolt kN	Weight (console and axle) kg	Total weight kg	Deflection mm
3	500	74053	200	440	3040	3100	350	105	806	980	340	33	10,3	1,624	57	162	12
	1000	74103	270	400			420	152	806	980			20,3	2,965	57	209	9
	1600	74163	300	515			450	180	1006	1180			26,0	4,52	63	243	10
	2000	74203	330	515			480	203	1006	1180			32,4	5,557	63	266	9
4	250	74024	200	440	4040	4100	350	128	806	980	340	33	7,9	1,067	57	185	16
	500	74054	240	420			390	165	806	980			14,3	1,771	57	222	16
	1000	74104	300	515			450	215	806	980			27,7	3,12	57	272	15
	1600	74164	360	565			510	290	1006	1180			35,5	4,79	63	353	13
	2000	74204	400	595			550	328	1006	1180			44,0	5,864	63	391	11
5	250	74025	240	420	5040	5100	390	196	806	980	340	33	10,7	1,234	57	253	17
	500	74055	300	465			450	256	806	980			18,9	1,994	57	313	22
	1000	74105	360	565			510	346	1006	1180			30,1	3,456	63	409	17
	1600	74165	400	685			550	394	1006	1180			45,3	5,045	63	457	19
	2000	74205	450	665			600	462	1256	1430			46,4	6,21	70	532	15
6	250	74026	270	415	6040	6100	420	260	806	980	340	33	13,7	1,391	57	317	20
	500	74056	330	555			480	342	806	980			23,8	2,205	57	399	20
	1000	74106	400	685			550	460	1006	1180			37,3	3,735	63	523	21
	1600	74166	500	665			650	620	1256	1430			48,2	5,616	70	690	15
	2000	74206	550	690			6060	6120	700	760			1506	1680	50,9	6,958	77
7	250	74027	300	415	7040	7100	450	340	806	980	340	33	17,1	1,587	57	397	22
	500	74057	360	515			510	460	1006	1180			25,0	2,509	63	523	24
	1000	74107	450	665			600	615	1256	1430			37,5	4,132	70	685	23

Standard colour yellow RAL1007 (jib and console).

Measure k=200mm for all these consoles.

Customer:	Offer nr:	Representative:
Type:	Hoist / speed:	Date:

250 KG COLUMN JIB CRANE, I-BEAM JIB

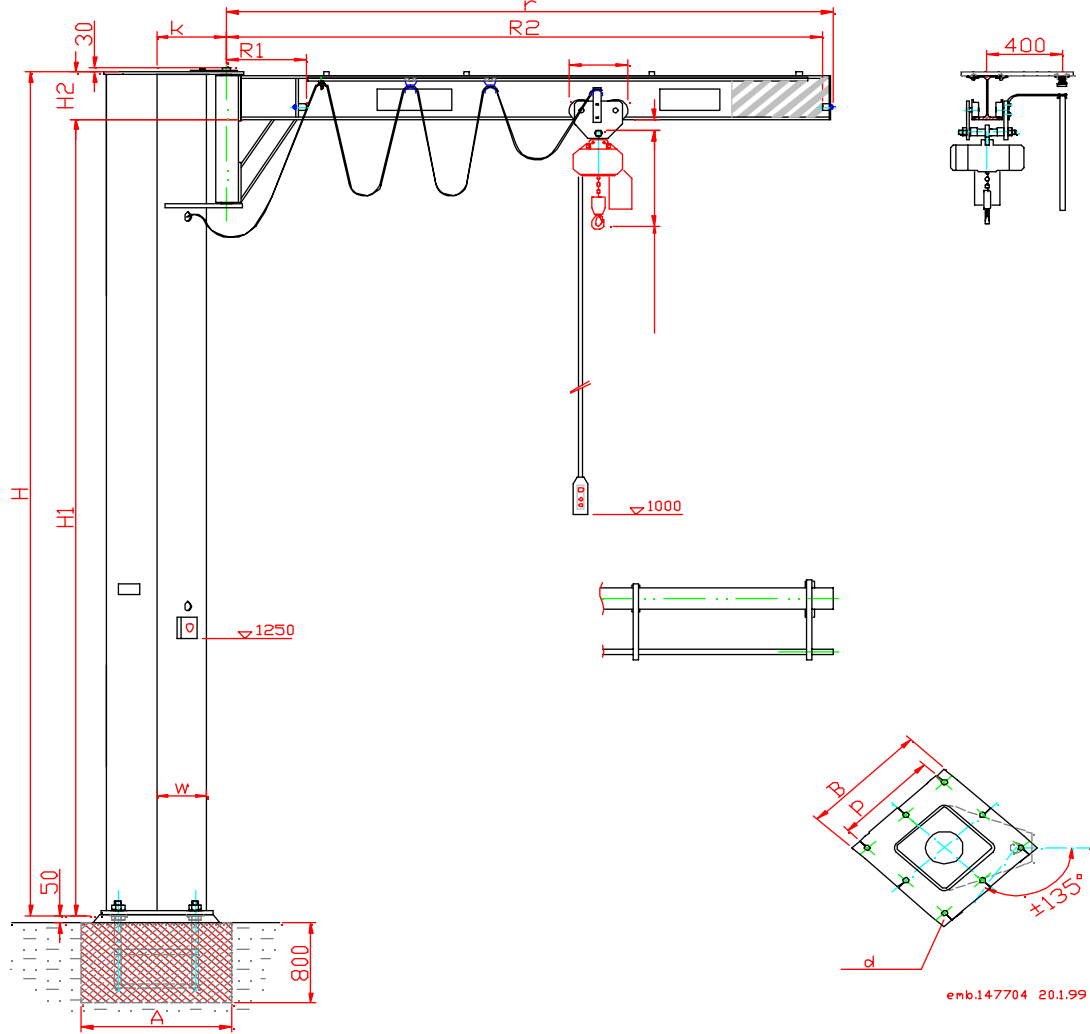


R	R1	R2 (mm)	r	Product nr.	H1	H2	H	k (mm)	w	deflection	IPe-beam	jib weight (kg)	Base plate	Column weight (kg)	Total weight (kg)	Bolt force (kN)	A (mm)
4	440	4040	4100	7502425	2500	225	2725	260	250	23	200	128	B500x500 p430x430 4 x 27mm 137935	191	332	20	1400
				7502430	3000		3225			25				215	356		
				7502435	3500		3725			27				239	380		
				7502440	4000		4225			29				263	404		
				7502445	4500		4725			31				287	428		
				7502450	5000		5225			33				311	452		
5	420	5040	5100	7502525	2500	265	2765	295	300	24	240	196	B700x700 p580x580 8x 30mm 137938	264	473	21	1500
				7502530	3000		3265			26				293	502		
				7502535	3500		3765			28				322	531		
				7502540	4000		4265			30				351	560		
				7502545	4500		4765			32				380	589		
				7502550	5000		5265			34				409	618		
6	415	6040	6100	7502625	2500	295	2795	295	300	30	270	260	B700x700 p580x580 8x 30mm 137938	265	538	27	1600
				7502630	3000		3295			32				294	567		
				7502635	3500		3795			34				323	596		
				7502640	4000		4295			36				352	625		
				7502645	4500		4795			38				381	654		
				7502650	5000		5295			41				410	683		
7	415	7040	7100	7502725	2500	325	2825	295	300	35	300	340	B700x700 8 x 30mm 137938	267	620	24	1800
				7502730	3000		3325			38				296	649		
				7502735	3500		3825			41				325	678		
				7502740	4000		4330			36				468	821		
				7502745	4500		4830			39				506	859		
				7502750	5000		5330			42				544	897		

Standard colour: Jib yellow RAL1007, column grey KY6; for more information on base plates, bolt cages and anchoring see dwg. 147892.

Customer:	Hoist:	Date:
Type:	Lifting speed:	Representative:

500 KG COLUMN JIB CRANE, I-BEAM JIB

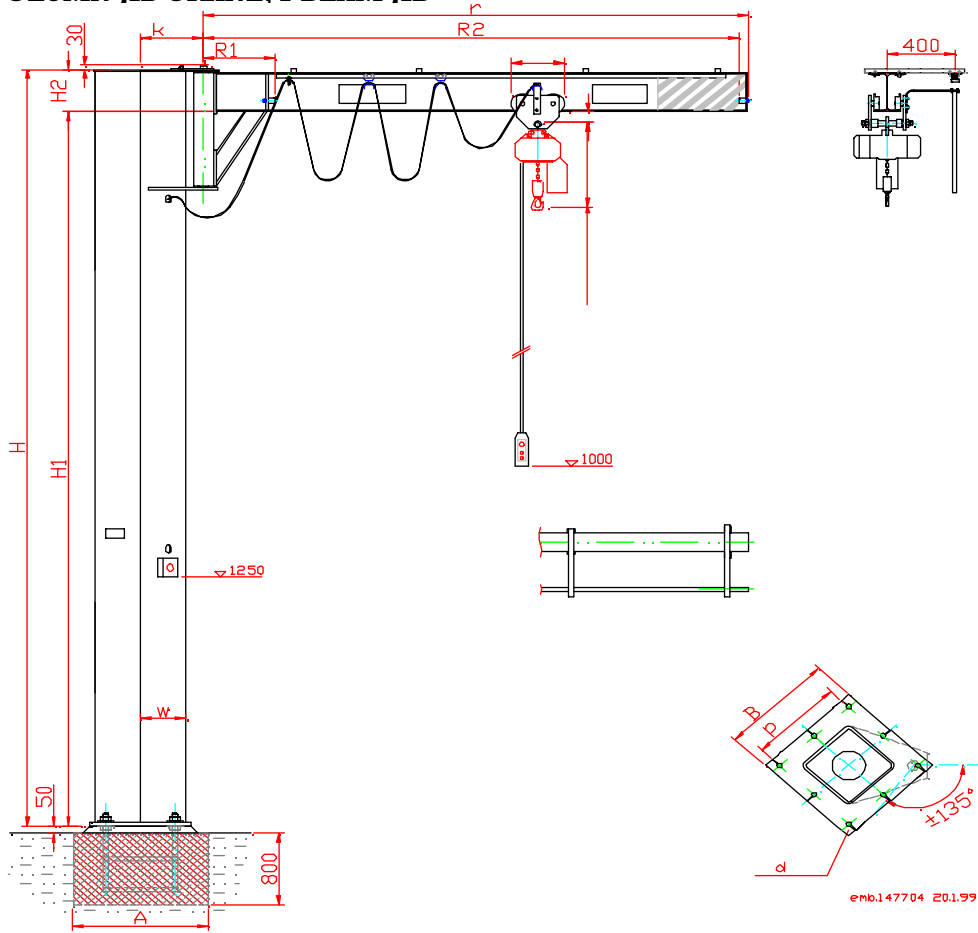


R	R1	R2 (mm)	r	Product nr.	H1	H2	H	k (mm)	w	deflection	IPE-beam	jib weight (kg)	Base plate	Column weight (kg)	Total weight (kg)	Bolt force (kN)	A (mm)
3	440	3040	3100	7505325	2500	225	2725	260	250	21	200	105	B500x500 p430x430 4 x 27mm 137935	191	309	27	1400
				7505330	3000		3225			23				215	333		
				7505335	3500		3725			25				239	357		
				7505340	4000		4225			27				263	381		
				7505345	4500		4725			29				287	405		
				7505350	5000		5225			31				311	429		
4	420	4040	4100	7505425	2500	265	2765	295	300	25	240	165	B700x700 p580x580 8x 30mm 137938	264	442	16	1600
				7505430	3000		3265			27				293	471		
				7505435	3500		3765			29				322	500		
				7505440	4000		4265			32				351	529		
				7505445	4500		4765			34				380	558		
				7505450	5000		5265			36				409	587		
5	465	5040	5100	7505525	2500	330	2830	340	350	24	300	256	B700x700 p580x580 8x 33mm 137940	354	623	27	1750
				7505530	3000		3330			26				392	661		
				7505535	3500		3830			28				430	699		
				7505540	4000		4330			30				468	737		
				7505545	4500		4830			32				506	775		
				7505550	5000		5330			34				544	813		
6	555	6040	6100	7505625	2500	360	2860	340	350	32	330	342	B700x700 p580x580 137940 B700x700 p580x580 137942	356	711	33	1900
				7505630	3000		3360			35				394	749		
				7505635	3500		3860			38				432	787		
				7505640	4000		4360			34				506	861		
				7505645	4500		4860			36				549	904		
				7505650	5000		5360			38				592	947		
7	515	7040	7100	7505725	2500	390	2890	375	400	35	360	460	B700x700 p580x580 8x 33mm 137943	384	860	38	2000
				7505730	3000		3390			38				427	903		
				7505735	3500		3890			41				470	946		
				7505740	4000		4390			43				513	989		
				7505745	4500		4890			46				556	1032		
				7505750	5000		5390			49				599	1075		

Standard colour: Jib yellow RAL1007, column grey KY6; for more information on base plates, bolt cages and anchoring see dwg. 147892.

Customer:	Hoist:	Date:
Type:	Lifting speed:	Representative:

1000 KG COLUMN JIB CRANE, I-BEAM JIB

ERIKKILA®

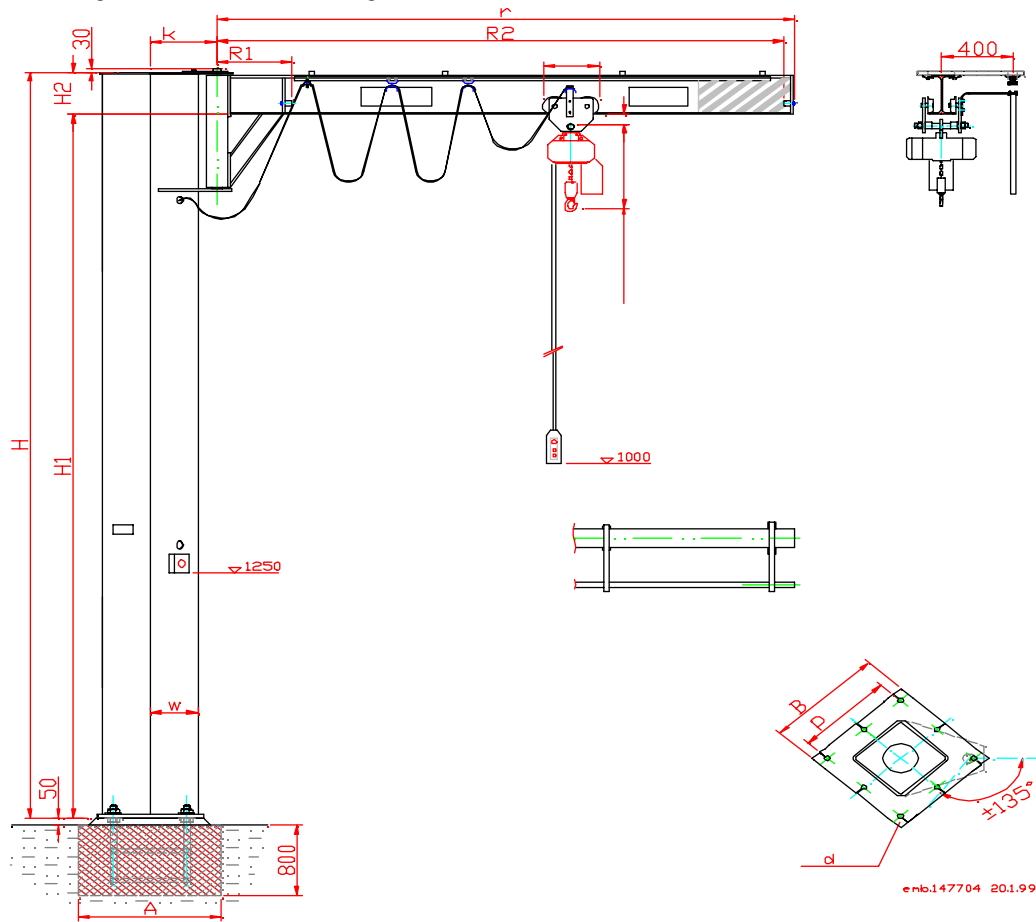


R	R1	R2	r	Product nr.	H1	H2	H	k	w	deflection	IPE-beam	jib weight (kg)	Base plate	Column weight (kg)	Total weight (kg)	Bolt force (kN)	A (mm)
3	400	3040	3100	7510325	2500	295	2795	295	300	19	270	152	B700x700 p580x580 8x 30mm 137938	266	431	22,8	1750
				7510330	3000		3295			22				295	460		
				7510335	3500		3795			24				300	489		
				7510340	4000		4295			27				353	518		
				7510345	4500		4795			29				382	547		
7510350	5000	5295	32	411	576												
4	515	4040	4100	7510425	2500	330	2830	375	400	23	300	215	B700x700 p580x580 8x 33mm 137942	375	603	35,2	1950
				7510430	3000		3330			24				300	646		
				7510435	3500		3830			26				353	689		
				7510440	4000		4330			30				504	732		
				7510445	4500		4830			30				547	775		
7510450	5000	5330	32	590	818												
5	565	5040	5100	7510525	2500	390	2890	375	400	28	360	346	B700x700 137943 B700x700 p580x580 8x 33mm 137945	384	746	42,6	2150
				7510530	3000		3390			32				427	789		
				7510535	3500		3890			29				510	872		
				7510540	4000		4390			31				558	920		
				7510545	4500		4890			33				606	968		
7510550	5000	5390	35	654	1016												
6	685	6040	6100	7510625	2500	435	2935	410	450	32	400	460	B700x700 p580x580 8x 40mm 137946 B750x750 p630x630	430	906	52,8	2350
				7510630	3000		3435			35				478	954		
				7510635	3500		3935			38				526	1002		
				7510640	4000		4435			35				670	1146		
				7510645	4500		4935			37				723	1199		
7510650	5000	5435	40	776	1252												
7	665	7040	7100	7510725	2500	485	2985	505	500	34	450	615	B750x750 p630x630 8x 40mm ()	517	1152	64,5	2400
				7510730	3000		3485			37				570	1205		
				7510735	3500		3985			39				623	1258		
				7510740	4000		4485			42				676	1311		
				7510745	4500		4985			45				729	1364		
7510750	5000	5485	48	782	1417												

Standard colour: jib yellow RAL1007, column grey KY6; for more information on base plates, bolt cages and anchoring see dwg. 147892.

Customer:	Hoist:	Date:
Type:	Lifting speed:	Representative:

1600 KG COLUMN JIB CRANE, I-BEAM JIB

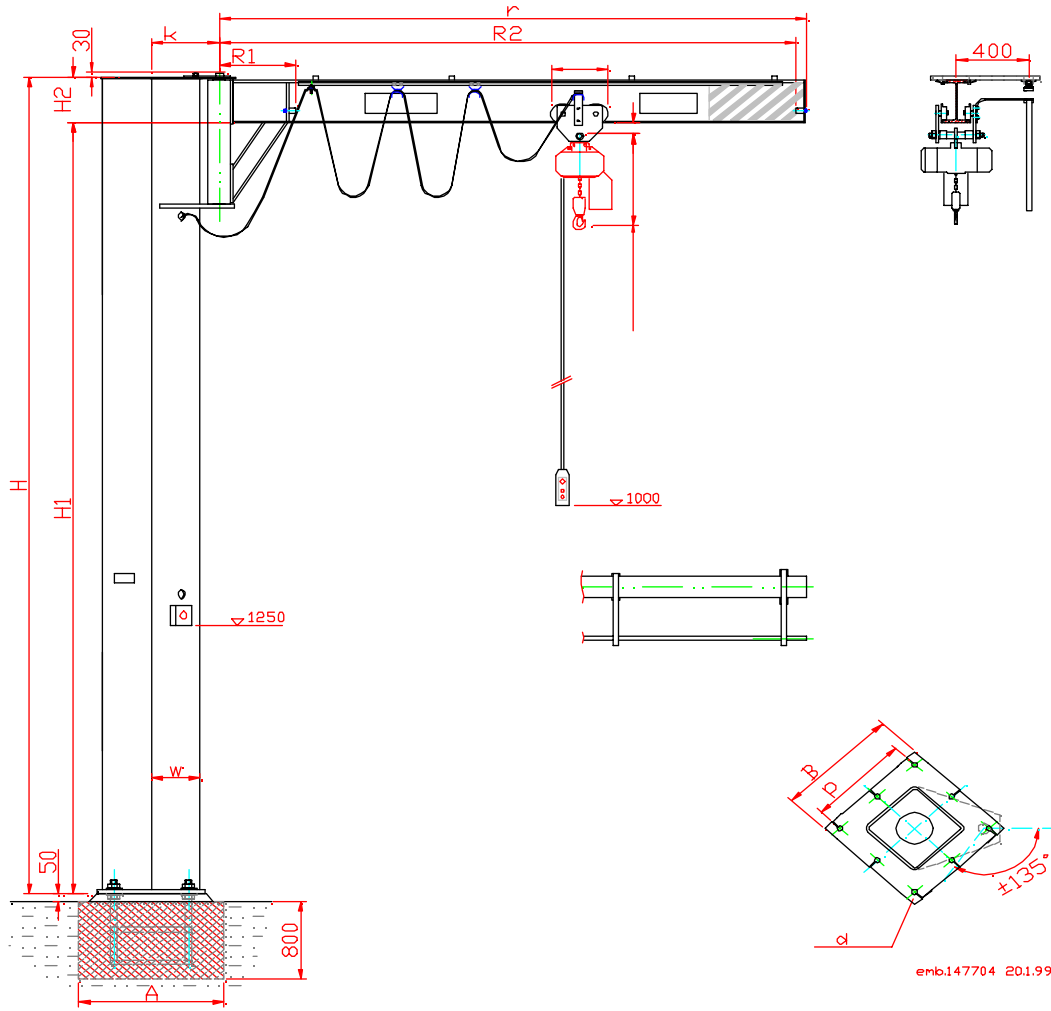


R	R1	R2	r	Product nr.	H1	H2	H	k	w	deflection	IPE-beam	Jib weight (kg)	Base plate	Column weight (kg)	Total weight (kg)	Bolt force (kN)	A (mm)
3	515	3040	3100	7516325	2500	330	2830	340	350	20,4	300	180	B700x700 p580x580 8 x 33mm 137941	354	550	43,6	2000
				7516330	3000		3330			23				392	588		
				7516335	3500		3830			26				430	626		
				7516340	4000		4330			22				508	704		
				7516345	4500		4830			24				551	747		
7516350	5000	5330	26	594	790												
4	565	4040	4100	7516425	2500	390	2890	375	400	25	360	290	B700x700 137943	384	690	53,8	2250
				7516430	3000		3390			28				427	733		
				7516435	3500		3890			26				511	817		
				7516440	4000		4390			28				559	865		
				7516445	4500		4890			30				607	913		
7516450	5000	5390	32	655	961												
5	685	5040	5100	7516525	2500	435	2935	505	500	28	400	394	B750x750 p630x630 8 x 40mm ()	512	922	58,3	2450
				7516530	3000		3435			31				565	975		
				7516535	3500		3935			33				618	1028		
				7516540	4000		4435			35				671	1081		
				7516545	4500		4935			38				724	1134		
7516550	5000	5435	40	777	1187												
6	665	6040	6100	7516625	2500	535	3035	505	500	28	500	620	B750x750 p630x630 8 x 40mm ()	522	1162	74,4	2600
				7516630	3000		3535			31				575	1215		
				7516635	3500		4035			34				628	1268		
				7516640	4000		4535			37				681	1321		
				7516645	4500		5035			41				734	1374		
7516650	5000	5535	44	787	1427												

Standard colour: Jib yellow RAL1007, column grey KY6; for more information on base plates, bolt cages and anchoring see dwg. 147892.

Customer:	Hoist:	Date:
Type:	Lifting speed:	Representative:

2000 KG COLUMN JIB CRANE, I-BEAM JIB

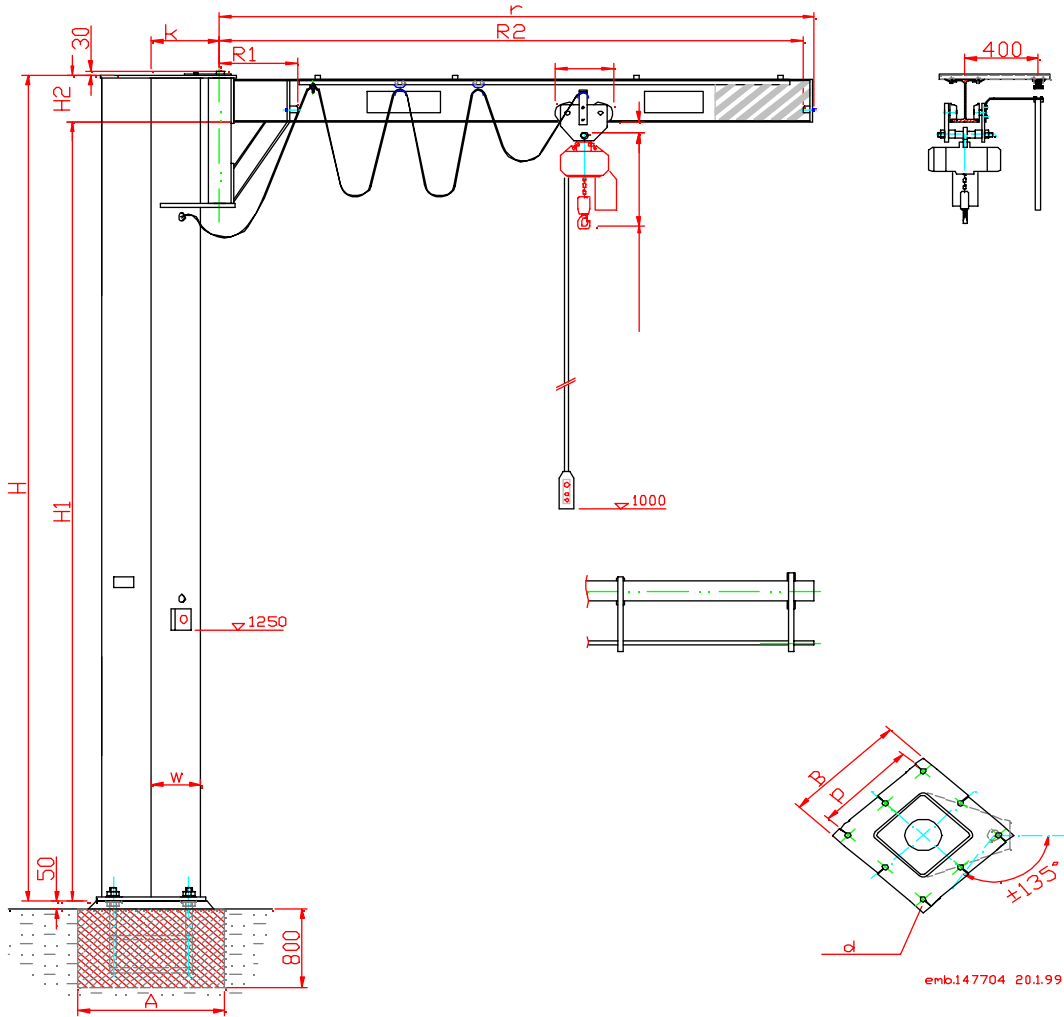

R	R1	R2 (mm)	r	Product nr.	H1	H2	H	k (mm)	w	deflection	IPE-beam	jib weight (kg)	Base plate	Column weight (kg)	Total weight (kg)	Bolt force (kN)	A (mm)
3	515	3040	3100	7520325	2500	360	2860	375	400	18	330	203	B700x700 p580x580 8x 40mm ()	389	608	49,1	2200
				7520330	3000		3360			20				432	651		
				7520335	3500		3860			22				475	694		
				7520340	4000		4360			25				518	737		
				7520345	4500		4860			27				561	780		
				7520350	5000		5360			29				604	823		
4	595	4040	4100	7520425	2500	430	2930	410	450	22	400	328	B700x700 p580x580 8x 40mm 137946	430	774	62,1	2400
				7520430	3000		3430			24				478	822		
				7520435	3500		3930			27				526	870		
				7520440	4000		4430			30				574	918		
				7520445	4500		4930			32				622	966		
				7520450	5000		5430			35				670	1014		
5	665	5040	5100	7520525	2500	485	2985	505	500	26	450	462	B750x750 p630x630 8x 40mm ()	517	999	71,7	2600
				7520530	3000		3485			29				570	1052		
				7520535	3500		3985			32				623	1105		
				7520540	4000		4485			35				676	1158		
				7520545	4500		4985			38				729	1211		
				7520550	5000		5485			40				782	1264		
6	690	6040	6100	7520625	2500	585	3085	505	500	29	550	760	B750x750 p630x630 8x 40mm	528	1312	91,9	2800
				7520630	3000		3585			33				581	1365		
				7520635	3500		4085			37				634	1418		
				7520640	4000		4585			34				757	1541		
				7520645	4500		5085			38				815	1599		
				7520650	5000		5585			41				873	1657		

Standard colour: jib yellow RAL1007, column grey KY6; for more information on base plates, bolt cages and anchoring see dwg. 147892.

Customer:	Hoist:	Date:
Type:	Lifting speed:	Representative: